

### Product Description:

The GALI Series is available in a wide variety of wattages for specific applications. This luminaire's screw base is available in E26 and E39, making it versatile for specific applications, and allows for easier installation and replacement. This fixture also has a very wide beam angle and high lumens output for maximum efficiency and efficacy. The GALI Series can function as a high bay, ceiling lamp, or even post top light.

### Features:

- **Application:** LED Retrofit
- **Mounting:** Screw ( E39/E39)
- **Warranty:** 5 Years
- **Long Life:** 100,000+ calculated hours
- **LED Source:** Samsung 2835
- **Operating Temperature:** -22°F ~ 131°F

### Technical Data:

Certifications	UL
CRI	≥ 80
IP Rating	Suitable for Damp Locations
CCT	2700K ~ 5700K
Input Voltage	100-277V




### Specifications:

Fixture Model	Total Lumens (5000K)	Efficacy (lm/w)	Dimensions (inches)	Weight (lbs)	Beam Angle
GALI-100W	14,201.5 lm	> 142 lm/W	8.9" x 8.96"	26.45	120°
GALI-120W	17,240 lm	> 143 lm/W	8.9" x 8.96"	26.45	
GALI-150W	19,803.3 lm	> 132 lm/W	8.9" x 8.96"	26.45	
GALI-200W	26,327.1 lm	> 131 lm/W	8.9" x 8.96"	26.45	

## Photometrics:

### GALI-150W-5K

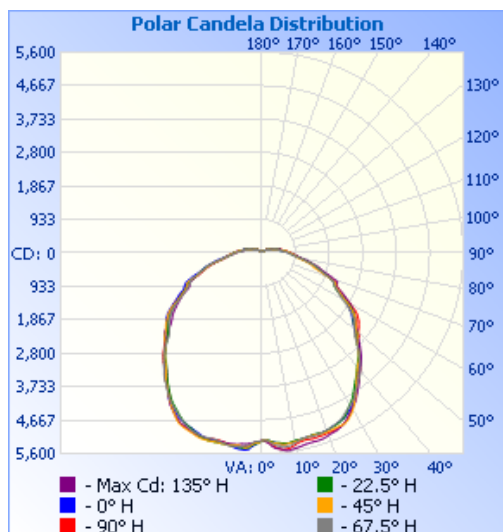

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
9.7ft	55.7 fc	33.3 ft	34.0 ft
19.3ft	14.1 fc	66.3 ft	67.6 ft
29.0ft	6.23 fc	99.6 ft	101.5 ft
38.7ft	3.50 fc	132.9 ft	135.5 ft
48.3ft	2.25 fc	165.8 ft	169.1 ft
58.0ft	1.56 fc	199.1 ft	203.1 ft

■ Vert. Spread: 119.6°  
■ Horiz. Spread: 120.5°

## Ordering Guide:

GALI-100W	100-277V	E39	CL	50K	120°
<b>Wattage:</b>	<b>Voltage:</b>	<b>Base:</b>	<b>Lens Type:</b>	<b>Color Temperature:</b>	<b>Beam Angle:</b>
100W	100-277V	E39	CL: Clear	27K	120°
120W		EX39	FR: Frosted	30K	
150W				40K	
200W				50K	
				57K	