

### Product Description:

The UFO Series delivers exceptional lumens with an efficacy of up to 135 lm/w. This luminaire has a life span of over 100,000 calculated hours and can be mounted in a variety of ways such as via hanging ring, hook, wall mount, and also pendant mount using an adapter connector. The mounting options can be customized upon special request. This luminaire is popular for its sleek and modern design, and has been nationally lab-tested in accordance to IES standards and is highly resistant to shock and vibration.

### Features:

- **Application:** LED High Bay
- **Mounting:** Hook / Hanging Ring / Pendant / Wall
- **Warranty:** 5 Years (fixture) 2 Years (EM battery)
- **LED Driver:** Meanwell
- **LED Source:** Philips Lumileds Luxeon 3030
- **Operating Temperature:** -40°F ~ 122°F



### Technical Data:

<b>Certifications</b>	<b>ETL</b>
<b>CRI</b>	<b>70/80</b>
<b>IP Rating</b>	<b>IP65 (IP67 optional)</b>
<b>CCT</b>	<b>3000K ~ 5700K</b>
<b>Input Voltage</b>	<b>90-305V or 347-480V</b>

### Specifications:

Fixture Model	Total Lumens (5000K)	Efficacy (lm/w)	Dimensions (diameter x height in inches)	Weight (lbs)	Beam Angle
UFO-70W	10,500 lm	>135 lm/W	12.6" x 6.7"	8.8	120° Symmetric Circular Spread
UFO-90W	13,900 lm	>135 lm/W	12.6" x 6.7"	8.8	
UFO-120W	18,200 lm	>135 lm/W	16.9" x 6.2"	14.08	
UFO-150W	21,624 lm	>135 lm/W	16.9" x 6.2"	14.08	
UFO-200W	25,586 lm	>127 lm/W	16.9" x 6.3"	14.96	

### Mounting Options:


**Wall Mount:**




**Hanging Ring:**



**Pendant Mount:**

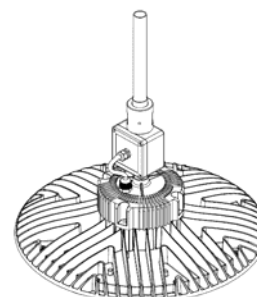


1/2" NPT  
or  
3/4" NPT



## Photometrics:


### UFO-90W-120deg

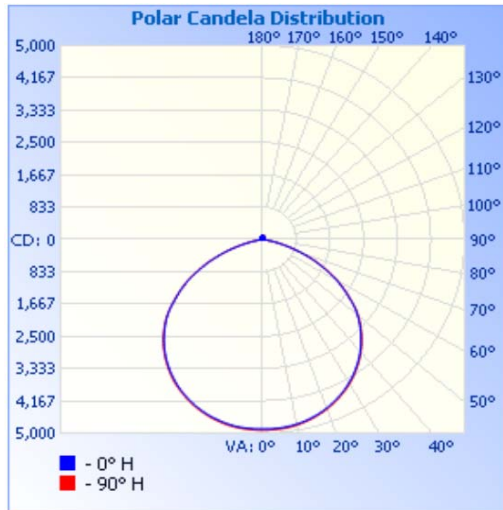

	Illuminance at a Distance	
	Center Beam fc	Beam Width
9.7ft	52.0 fc	29.5 ft 29.7 ft
19.3ft	13.1 fc	58.7 ft 59.0 ft
29.0ft	5.82 fc	88.2 ft 88.7 ft
38.7ft	3.27 fc	117.7 ft 118.4 ft
48.3ft	2.10 fc	146.9 ft 147.8 ft
58.0ft	1.45 fc	176.4 ft 177.5 ft

■ Vert. Spread: 113.3°  
■ Horiz. Spread: 113.7°

### UFO-150W-120deg

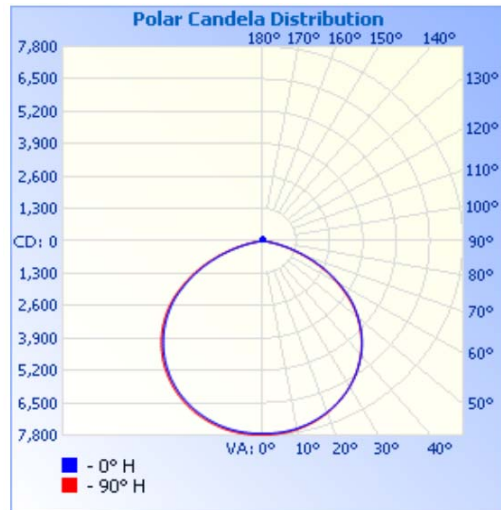

	Illuminance at a Distance	
	Center Beam fc	Beam Width
9.7ft	82.2 fc	30.3 ft 30.4 ft
19.3ft	20.8 fc	60.2 ft 60.5 ft
29.0ft	9.19 fc	90.5 ft 90.9 ft
38.7ft	5.16 fc	120.8 ft 121.2 ft
48.3ft	3.31 fc	150.8 ft 151.3 ft
58.0ft	2.30 fc	181.0 ft 181.7 ft

■ Vert. Spread: 114.7°  
■ Horiz. Spread: 114.9°

## Ordering Guide:

UFO-150W	90-	WH	120° CL	40K	PMC 1/2"	IP67 - EMIP65
----------	-----	----	---------	-----	----------	---------------

#### Wattage:

70W  
90W  
120W  
150W  
200W

#### Voltage:

90-305V  
347-480V

#### Color:

BL: Black  
WH: White

#### Lens:

Clear Lens  
120° CL  
Frosted Lens  
120° FR

#### CCT:

30K  
40K  
50K  
57K

#### Mount:

HR: Hanging Ring  
WM: Wall  
YM: Yoke Mount  
(can be used for Pendant)  
PMC 1/2: 1/2" NPT  
Pendant Connector  
PMC 3/4: 3/4" NPT  
Pendant Connector

#### Optional Accessories:

DM: 0-10V Dimming IP67: IP67 rating

MS: Motion Sensor PCR:

PC Reflector



WG: Wire Guard



UL: 8W Up-Light



EMIP40: IP40 Emergency Back up Battery

EMIP65: IP65 Emergency Back up Battery



IP65CC-Length: Cord with IP65 connector  
+ Length (standard is 1 ft)