

LED Wall Pack Light Instruction

Warning :

- 1.Can not use the electric generator to test the LED lamp.
2. This luminaire must be installed in accordance with your local electrical codes and requirements;
3. Do not install the luminaire in the rain, to avoid lightning stroke and damage to luminaire.

Installation notice :

1. This luminaire must be installed by qualified electrician to avoid electric shock and fire accident;
2. Wear gloves before installation in order to avoid injury;
3. Turn off the power immediately when there is smoke and fire during installation; inform professionals to overhaul;
4. This luminaire is suited for outdoor use.

The installation of the product can be used when it is marked with "✓".

✓ Installation I :

Wiring from the bottom of luminaire

- 1.Cut holes on the wall according to locating plate. (Figure 1-1)




Figure 1-1

- 2.Fix rubber plugs into holes.(Figure 1-2)




Figure 1-2

- 3.Align mounting bracket with hole; tighten screws. (Figure 1-3)




Figure 1-3

- 4.Make wiring connection and go through isolation treatment.(Figure 1-4)




Figure 1-4

- 5.Fix the luminaire on the bracket and tighten screws on the bottom. (Figure 1-5)




Figure 1-5

- 6.After installation, tighten the screws. (Figure 1-6)




Figure 1-6

✓ Installation II:

Wiring from the side of luminaire

- 1.Cut holes on the wall according to locating plate (Figure 2-1)




Figure 2-1

- 2.Fix rubber plugs into holes.(Figure 2-2)




Figure 2-2

- 3.Align mounting bracket with hole; tighten screws. (Figure 2-3)




Figure 2-3

- 4.Fix the luminaire on the bracket; make wiring connection from side and go through isolation treatment. (Figure 2-4)

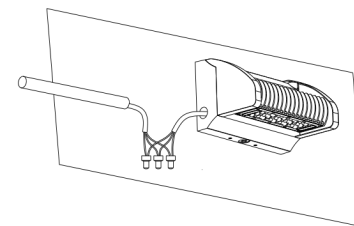


Figure 2-4

5. Tighten the pipe on the luminaire; after installation, tighten the screws. (Figure 2-5)

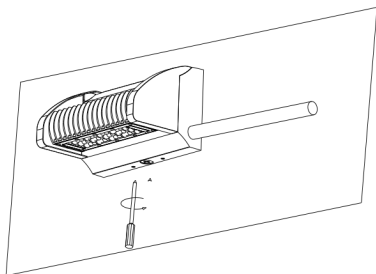


Figure 2-5

□ Installation III: Bracket installation

1. Cut holes on the wall according to locating plate. (Figure 3-1)




Figure 3-1

2. Fix rubber plugs into holes. (Figure 3-2)




Figure 3-2

3. Align mounting bracket with hole; tighten screws. (Figure 3-3)




Figure 3-3

4. Pass wires through rubber ring and junction box, align with holes and lock junction box. (Figure 15)




Figure 3-4

5. Make wiring connection and go through isolation treatment. (Figure 3-5)




Figure 3-5

6. Push the wires into junction box; after installation, tighten the screws. (Figure 3-6)




Figure 3-6

Standard wire:

L/live wire: Black\Brown; N/null wire: White\Blue;
Ground wire: Green\Yellow-green.

Warning/Avertissement :

MIN 75 °C SUPPLY CONDUCTOR

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 75 °C MIN
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE
CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE
QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT
AINSI QUE LES RISQUES INHÉRENTS.