

### Product Description:

The UFO-G3 series is the 3rd generation of our UFO highbay fixture. The UFO-G3 has been upgraded to produce a higher, more efficient lumen output and has a variety of accessories available, making the UFO-G3 an ideal solution to most LED lighting needs. The UFO-G3 is also a great value; providing affordable pricing without sacrificing quality. Be sure to contact a member of our sales team for details!

### Features:

- **Application:** LED High Bay
- **Mounting:** Hanging Ring, Wall, Hook, Yoke, Pendant
- **Warranty:** 5 Years
- **LED Source:** Osram/Lumileds 3030
- **Operating Temperature:** -40°F ~ 131°F
- **Power Factor:** >0.90

### Technical Data:

Certifications	ETL
CRI	≥ 70 (80 & 90 available)
IP Rating	IP65 / IP67 available
CCT	2700K ~6500K
Input Voltage	90-305V (347-480V optional)



### Mounting Options:

**Hanging Ring**



**Hanging Ring with 304-Stainless Steel Hook**



**Wall Mount**




**Yoke Mount**

(Can be used for 1/2" or 3/4" NPT Pendant)



**Pendant Mount Connector**

(1/2" or 3/4" NPT)

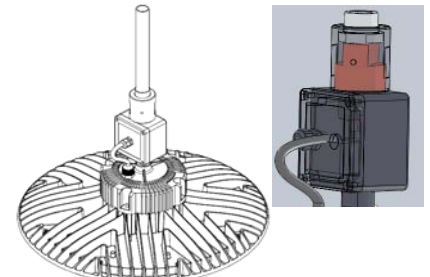

## Specifications:

### Regular LPW (Lumens per Watt):


Fixture Model	Beam Angle	Total Lumens (5000K)	Efficacy LPW	Dimension (Diameter x Height)	Weight (lbs)
UFO-70W-G3-170LPW	90°	13,173.1 lm	188.1 lm/W	Φ 11.3" x 6.37"	5.5
	120°	13,612.5 lm	194.4 lm/W		
UFO-90W-G3-170LPW	90°	17,275.5 lm	191.9 lm/W		
	120°	17,551.1 lm	195.1 lm/W		
UFO-150W-G3-170LPW	90°	26,829.4 lm	178.8 lm/W	Φ 13.3" x 6.65"	7.7
	120°	27,853.3 lm	185.6 lm/W		
UFO-200W-G3-170LPW	90°	34,203.9 lm	171.1 lm/W	Φ 15.2" x 6.89"	9.9
	120°	35,351.3 lm	176.7 lm/W		
UFO-300W-G3-170LPW	90°	49,253.6 lm	164.1 lm/W	Φ 15.2" x 8.03"	15.2
	120°	50,905.8 lm	169.6 lm/W		

### Eco-L Option (Lower LPW)



Fixture Model	Beam Angle	Total Lumens (5000K)	Efficacy LPW	Dimension (Diameter x Height)	Weight (lbs)
UFO-70W-G3-150LPW	90°	11,625.3 lm	166.1 lm/W	Φ 11.3" x 6.37"	5.5
	120°	12,041.7 lm	172.1 lm/W		
UFO-90W-G3-150LPW	90°	15,245.8 lm	169.39 lm/W		
	120°	15,491.4 lm	172.1 lm/W		
UFO-150W-G3-150LPW	90°	23,547.0 lm	156.9 lm/W	Φ 13.3" x 6.65"	7.7
	120°	24,394.7 lm	162.6 lm/W		
UFO-200W-G3-150LPW	90°	30,185.4 lm	150.9 lm/W	Φ 15.2" x 6.89"	9.9
	120°	31,272.8 lm	156.3 lm/W		
UFO-300W-G3-150LPW	90°	44,976.3 lm	149.9 lm/W	Φ 15.2" x 8.03"	15.2
	120°	46,596.5 lm	155.3 lm/W		

**Dimensions:**


**70W & 90W**

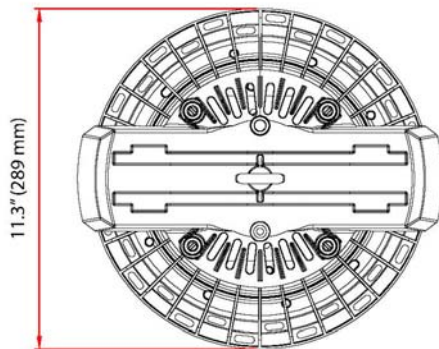





**120W & 150W**

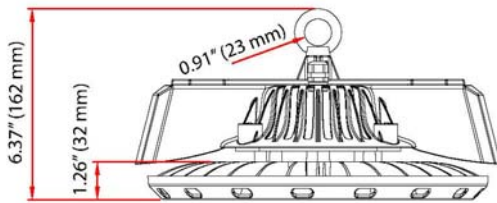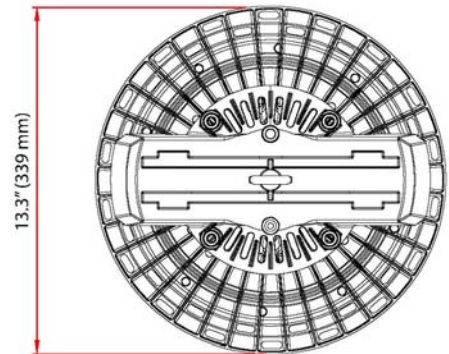

**200W**

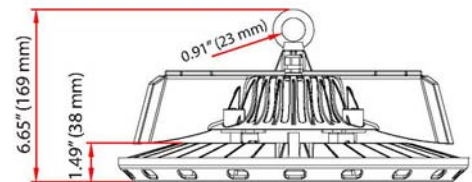

**300W**

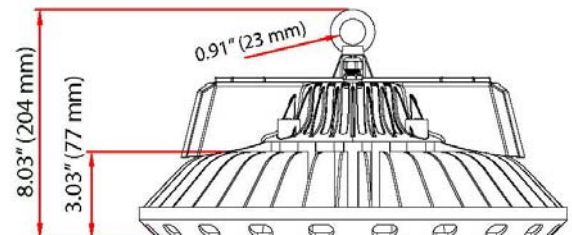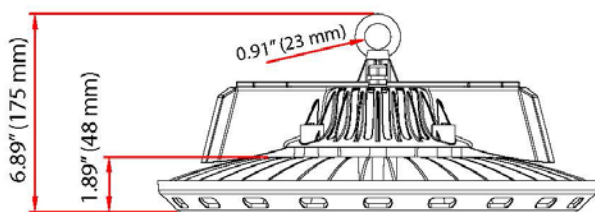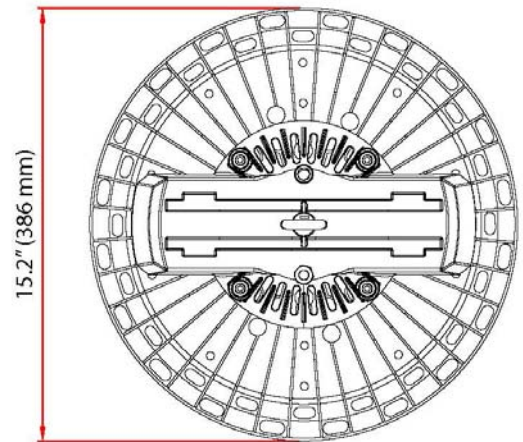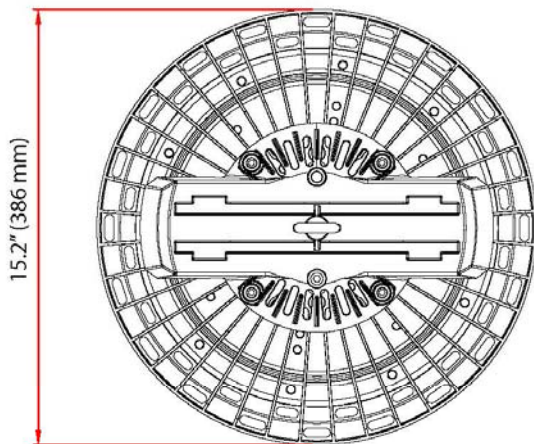


# Photometrics:

## UFO-70W-G3-50K-90°

Illuminance at a Distance			
	Center Beam fc	Beam Width	
9.7ft	58.7 fc	25.1 ft	25.8 ft
19.3ft	14.8 fc	49.9 ft	51.3 ft
29.0ft	6.57 fc	75.0 ft	77.1 ft
38.7ft	3.69 fc	100.1 ft	102.9 ft
48.3ft	2.37 fc	124.9 ft	128.4 ft
58.0ft	1.64 fc	150.0 ft	154.2 ft


■ Vert. Spread: 104.6°  
■ Horiz. Spread: 106.1°

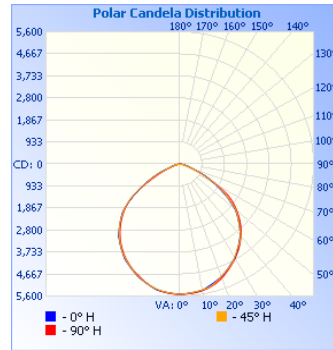

## UFO-300W-G3-50K-90°

Illuminance at a Distance			
	Center Beam fc	Beam Width	
9.7ft	234 fc	22.7 ft	22.9 ft
19.3ft	59.2 fc	45.2 ft	45.7 ft
29.0ft	26.2 fc	67.9 ft	68.6 ft
38.7ft	14.7 fc	90.6 ft	91.6 ft
48.3ft	9.45 fc	113.1 ft	114.3 ft
58.0ft	6.55 fc	135.8 ft	137.2 ft

■ Vert. Spread: 99.0°  
■ Horiz. Spread: 99.6°

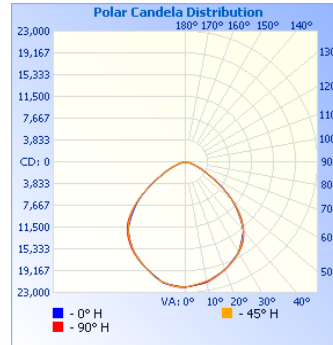

# Accessories:

## Emergency Backup Battery



**10W for 3 hours**  
**100-280VAC**  
**Standard: IP40**  
**IP65 housing available (remote install)**


IP65 EM Housing:



## Aluminum Dome



# Ordering Guide:



**Model:**  
**Standard :**  
 UFO-70W-G3-170LPW  
 UFO-90W-G3-170LPW  
 UFO-120W-G3-170LPW  
 UFO-150W-G3-170LPW  
 UFO-200W-G3-170LPW  
 UFO-300W-G3-170LPW

**Eco-L (Lower LPW):**  
 UFO-70W-G3-150LPW  
 UFO-90W-G3-150LPW  
 UFO-120W-G3-150LPW  
 UFO-150W-G3-150LPW  
 UFO-200W-G3-150LPW  
 UFO-300W-G3-150LPW

**Voltage:**  
 90-305V  
 347-480V

**Color:**  
 BL: Black

**CCT:**  
 27K  
 30K  
 40K  
 50K  
 57K  
 65K

**Mount (images on pg 1):**  
 HR: Hanging Ring  
**304HK:** Hanging Ring + 304 Stainless Steel Hook  
 WM: Wall  
 YM: Yoke Mount (can be used for 1/2" or 3/4" NPT Pendant)  
**PMC 1/2:** 1/2" NPT Pendant Connector  
**PMC 3/4:** 3/4" NPT Pendant Connector

**Beam Angle:**  
 Clear  
**90° CL\***  
**120° CL**  
 Frosted  
**120° FR**

**Optional Accessories:**  
**DM:** 1-10V Dimming  
**MS:** Motion Sensor  
**WG:** Wire Guard  
**UL:** 8W Up-Light LED Strip  
**AL:** Aluminum Dome  
**CR180 / CR190**  
**IP67**  
**EMIP40:** IP40 Emergency Back up Battery  
**EMIP65:** IP65 Remote Emergency Back up Battery  
**SC-Length:** Safety Cable + Length  
**IP65CC-Length:** Extended Cord with IP65 connector + Length  
*(standard cord length is 1-ft)*