

Product Description:

This CALLISTO Series is an exceptional Wall Pack with a calculated life of over 100,000 hours at L70 standards. This Wallpack is available in black, brown, and white. The fixture has an IP rating of 65, making it suitable to use in wet conditions. The CALLISTO is highly resistant to shock and vibration and offers instant-on and instant-restrike. This fixture has been lab tested in accordance to IES Standards.



Features:

- **Application:** LED Wall Pack
- **Installation:** Wall Mount
- **Warranty:** 5 Years
- **Long life:** Calculated 100,000+ hrs at L70 Standards
- **Operating Temperature:** -22°F ~ 131°F

Technical Data:

LED Source	Cree
CRI	≥ 80
IP Rating	IP65
CCT	3000K ~ 6000K
Input Voltage	100-277V or 200-480V




CALLISTO WITH PHOTOCCELL

Specifications:

Fixture Model	Total Lumens	Efficacy (lm/w)	Dimensions (inches)	Weight (lbs)	Beam Angle
CALLISTO-60W	4,865.6 lm	>68.32 lm/W	<p>14.41 L x 7.72 W x 8.9 H</p>	12.16	90°x 135°
CALLISTO-80W	6,285.8 lm	>73 lm/W		12.16	
CALLISTO-120W	11,533.3 lm	>71.52 lm/W		17.63	
CALLISTO-150W	12,053.7 lm	>69 lm/W		17.63	

Photometrics:

CALLISTO-60W

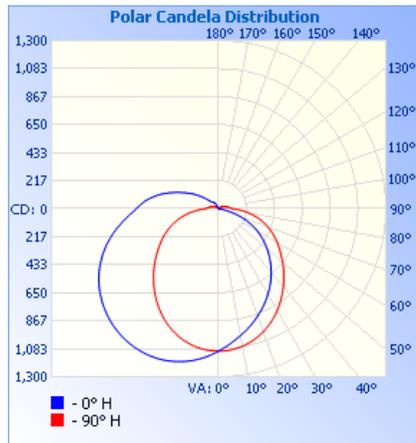


ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
9.7ft	11.7 fc	43.2 ft	29.2 ft
19.3ft	2.96 fc	86.0 ft	58.1 ft
29.0ft	1.31 fc	129.2 ft	87.3 ft
38.7ft	0.73 fc	172.4 ft	116.5 ft
48.3ft	0.47 fc	215.1 ft	145.3 ft
58.0ft	0.33 fc	258.4 ft	174.5 ft

■ Vert. Spread: 131.6°
■ Horiz. Spread: 112.8°

CALLISTO-120W

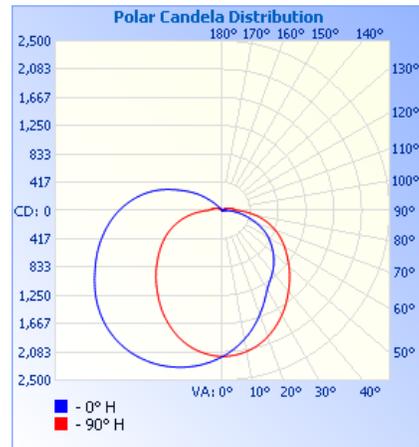

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
9.7ft	22.9 fc	47.0 ft	31.0 ft
19.3ft	5.78 fc	93.5 ft	61.7 ft
29.0ft	2.56 fc	140.4 ft	92.7 ft
38.7ft	1.44 fc	187.4 ft	123.8 ft
48.3ft	0.92 fc	233.9 ft	154.5 ft
58.0ft	0.64 fc	280.9 ft	185.5 ft

■ Vert. Spread: 135.1°
■ Horiz. Spread: 116.0°

Ordering Guide:

CALLISTO-120W	100-277V	BL	40K	WALL	90° x 135°	CP	PC
Wattage: 60W 80W 120W 150W	Voltage: 100-277V 200-480V	Color: BL: Black (RAL9005) BR: Brown (RAL:7022) WH: White (RAL:9010)	CCT: 30K 40K 50K 60K	Mounting: Wall	Beam Angle: 90° x 135°	Lens Type: CP: Clear PC FP: Frosted PC CG: Clear Glass FG: Frosted Glass	Optional Accessories: [PC]: Photocell