

REVOLVE Series

Product Description:

The REVOLVE Series delivers exceptional lumens up to 135 lm/w. The REVOLVE is rotatable and can also be used as an up-light. This luminaire does not emit any UV or IR rays and contains no mercury materials, making it eco-friendly and safe to use. The REVOLVE is easy to install and has a calculated life span of over 100,000 hours.

Features:

- **Application:** LED Wallpack
- **Installation:** Wall Mount
- **Warranty:** 5 Years
- **LED Source:** Lumileds Luxeon 3030 2D
- **Operating Temperature:** -4°F ~ 122°F
- **Power Factor:** > 0.9
- **Housing Material:** Aluminum

Technical Data:

Certifications	UL
CRI	≥ 70
IP Rating	IP 65
CCT	3000K ~ 6500K
Input Voltage	100-277V



REVOLVE 25W to 60W-1




REVOLVE 60W-2 to 120W

Specifications:

Fixture Model	Total Lumens	Efficacy (lm/w)	Dimensions (inches)	Weight (lbs)	Beam Angle
REVOLVE-25W	3,666.4 lm	> 146 lm/W	9.13 x 5.20 x 5.67	4.1	60°
REVOLVE-40W	5,007.2 lm	> 125 lm/W	9.13 x 5.20 x 5.67	4.45	
REVOLVE-60W-1	7,406.8 lm	> 123 lm/W	9.13 x 5.20 x 5.67	5.11	
REVOLVE-60W-2	8038.2 lm	> 133 lm/W	9.13 x 5.20 x 8.86	6.88	
REVOLVE-80W	10,786 lm	> 134 lm/W	9.13 x 5.20 x 8.86	6.88	
REVOLVE-120W	14,394 lm	> 119 lm/W	9.13 x 5.20 x 8.86	7.45	

Photometrics:

REVOLVE-60W-2 Modules

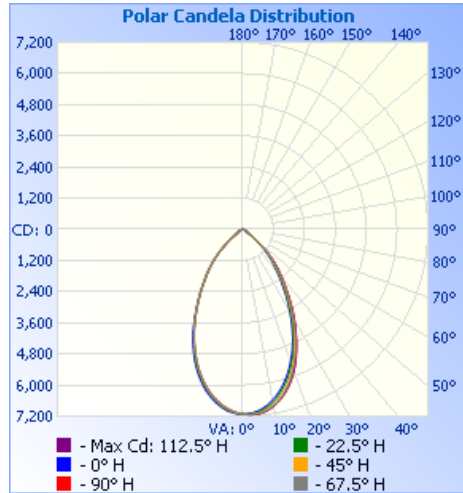

	Illuminance at a Distance	
	Center Beam fc	Beam Width
9.7ft	75.6 fc	11.4 ft 11.8 ft
19.3ft	19.1 fc	22.7 ft 23.5 ft
29.0ft	8.46 fc	34.2 ft 35.3 ft
38.7ft	4.75 fc	45.6 ft 47.1 ft
48.3ft	3.05 fc	56.9 ft 58.8 ft
58.0ft	2.12 fc	68.3 ft 70.6 ft

■ Vert. Spread: 61.0°
■ Horiz. Spread: 62.7°

Ordering Guide:

REVOLVE-25W	BL	100-277V	WALL	50K	60°
Wattage: 25W 40W 60W-1 Module 60W-2 Modules 80W 120W	Color: BL: Black (RAL 9017)	Voltage: 100-277V	Mounting: Wall Mount	CCT: 30K 40K 50K 57K 65K	Beam Angle: 60°