

Product Description:

The GEMINI-W Series is available from 30W-160W. This luminaire has been nationally lab tested in accordance with IES standards. The GEMINI-W has a calculated life of over 100,000 hours and is available with a wide arrange of beam angles for specific user needs. This luminaire is highly resistant to shock and vibration and provides instant-on/instant-restrike performance. 10Kv surge protector comes standard with fixture.



Features:

- **Application:** LED Wallpack
- **Mounting:** Wall Mount
- **Warranty:** 5 Years
- **Long Life:** 100,000+ calculated hours
- **LED Source:** Philips Lumileds / Cree
- **Operating Temperature:** -40°F ~+ 122°F
- **Power Factor:** > 0.95

Technical Data:

Certifications	UL
CRI	≥ 70
IP Rating	IP67
CCT	3000K ~ 5700K
Input Voltage	120-277V or 347-480V




Specifications:

Fixture Model	Total Lumens (5000K)	Efficacy (lm/w)	Dimensions (inches)	Weight (lbs)	Beam Angle
GEMINI-W-30W	4,030 lm	>130 lm/W	8.46"x12.99"x2.76"	10.65	10° 25° 40° 60° 90° 120° T1M / T2M T3M / T3L T4S 120° Frosted Lens
GEMINI-W-60W	8,052 lm	>132 lm/W	10.83"x12.99"x2.76"	12.99	
GEMINI-W-90W	11,745 lm	>135 lm/W	13.19"x12.99"x2.76"	16.24	
GEMINI-W-120W	15,340 lm	>130 lm/W	15.55"x12.99"x2.76"	15.72	
GEMINI-W-80W/480V	9,984 lm	>128 lm/W	10.83"x12.99"x2.76"	11.49	
GEMINI-W-120W/480V	15,340 lm	>130 lm/W	13.19"x12.99"x2.76"	13.76	
GEMINI-W-160W/480V	20,280 lm	>130 lm/W	15.55"x12.99"x2.76"	15.72	

Photometrics:

GEMINI-W-60W/5000K

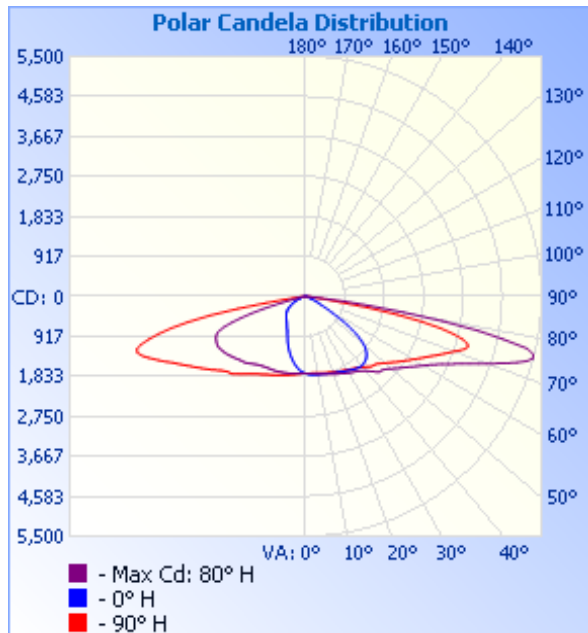

Illuminance at a Distance			
	Center Beam fc	Beam Width	
9.7ft	18.7 fc	13.8 ft	6.3 ft
19.3ft	4.73 fc	27.5 ft	12.4 ft
29.0ft	2.10 fc	41.3 ft	18.7 ft
38.7ft	1.18 fc	55.1 ft	24.9 ft
48.3ft	0.76 fc	68.8 ft	31.1 ft
58.0ft	0.52 fc	82.6 ft	37.4 ft

■ Vert. Spread: 70.9°
■ Horiz. Spread: 35.7°

Ordering Guide:

GEMINI-W-90W	BL	120-277V	50K	120°	DIM-WG										
Wattage: <table border="1"> <tr> <td>120V</td> <td>480V</td> </tr> <tr> <td>30W</td> <td>80W</td> </tr> <tr> <td>60W</td> <td>120W</td> </tr> <tr> <td>90W</td> <td>160W</td> </tr> <tr> <td>120W</td> <td></td> </tr> </table>	120V	480V	30W	80W	60W	120W	90W	160W	120W		Color: BL: Black (RAL: 9011) WH: White (RAL: 9010) GR: Grey (RAL: 7004) BZ: Bronze (RAL 8014)	Voltage: 120-277V 347-480V	Color Temperature: 30K 40K 50K 57K	Beam Angle: 10° 25° 40° 60° 90° 120° T1M / T2M T3M / T3L T4S 120° Frosted Lens°	Optional Accessories: DIM: Dimmable 7Pn: 7pin Photocell Recptacle WG: Wire Guard
120V	480V														
30W	80W														
60W	120W														
90W	160W														
120W															